




3m (10') Flexible Spill Berm

UT2100

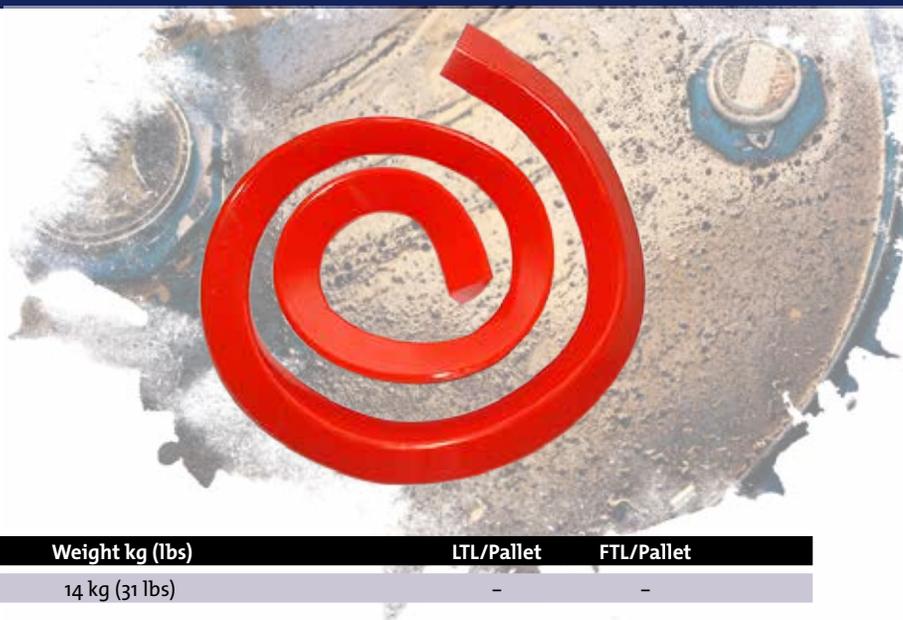

Flexible Spill Berm | Secondary Containment

Product Code	Dimensions (l x w x h)	Weight kg (lbs)	LTL/Pallet	FTL/Pallet
UT2100	3 m x 10 cm x 58 cm (10' x 4" x 2¼")	14 kg (31 lbs)	-	-

This temporary flexible berm seals off spills from the environment, nearby drains, and doorways. It is available as a standard 3m (10 foot) section but can also be cut to various lengths.

The unique, urethane material “weeps” into small cracks and crevices to seal off liquid flow. Spill Berm is non-absorbing and is easily cleaned for repeated use. Some applications include:

- Spill response
- Temporary secondary containment
- Sealing off of doorways during wash down operations

Flexible Ultra-Spill Berm will bend and turn to form almost any shape while temporarily “bonding” to any smooth surface and is very effective. The Flexible Spill Berm helps comply with NPDES and SPCC requirements.



* Basis weights and recycled content are ± 5%

** Measures a case/bale using ASTM 726 (long test) with medium viscosity oil and tap water. Statistical average derived from real time production QC data.

*** Weight per case ± 0.5 kg/lbs.

Compliance

Related Regulations	Description
29CFR 1910.22(a)(2)	“The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition.”
29CFR 1910.120(j)(1)(vii)	“... suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur.”