




Drain Seal®

UT2127

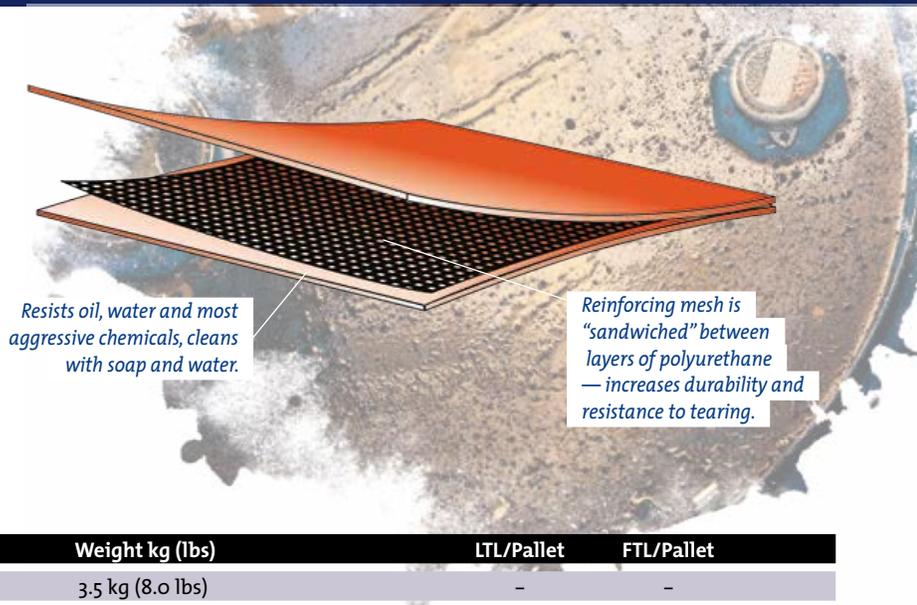

Resists oil, water and most aggressive chemicals, cleans with soap and water.

Reinforcing mesh is “sandwiched” between layers of polyurethane — increases durability and resistance to tearing.

Drain Seal | Secondary Containment

Product Code	Dimensions cm (inches)	Weight kg (lbs)	LTL/Pallet	FTL/Pallet
UT2127	61 x 61 x 1 (24" x 24" x 3/8")	3.5 kg (8.0 lbs)	-	-

- Reinforcing mesh is “sandwiched” between layers of polyurethane— increases durability and resistance to tearing.
- Unique, urethane construction allows the pad to deform and seal off most drains — temporarily “seals” to any smooth surface.
- A valuable addition to any emergency response plan, spill kit, SPCC, or storm water management program.
- Unlike some alternative products, BOTH sides will quickly seal drains — there is no specified “top” or “bottom.”

Installation:

Easily installed in most drains. Simply lay the seal mat over the drain that requires covering.



* Basis weights and recycled content are ± 5%

** Measures a case/bale using ASTM 726 (long test) with medium viscosity oil and tap water. Statistical average derived from real time production QC data.

*** Weight per case ± 0.5 kg/lbs.

Compliance

Related Regulations	Description
29CFR 1910.22(a)(2)	“The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition.”
29CFR 1910.120(j)(1)(vii)	“... suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur.”