



# 4 Drum Spill Pallet

**SJ-110-006**

Spill Pallet | Four Drum | Secondary Containment

Product Code	Length	Width	Height	Sump Capacity	Color	Weight max	Weight	FTL/Pallet
SJ-110-006	57.5" (1460 mm)	57.5" (1460 mm)	12" (305 mm)	66 gal (250 ltr)	Yellow	2755 lbs (1250 kg)	81.5 lbs (37 kg)	20



**ISO 9001:2015**  
**ISO 14001:2004**

*This product is fully recyclable*

**in stock**

*This product is always in stock*

A tough and durable spill pallet with a removable platform that provides space for four 205 litre drums side by side. The sump capacity meets and exceeds US, European and UK regulations.

When unused the platform can be removed and other pallets of the same size can be stacked to save space.

The pallet has hand inserts and access holes for inspection and pump insertion. The pallet is compatible with most forklifts and pallet trucks.

**Key features**

- Compatible with most forklifts and pallet trucks
- Durable removable platform
- Capacity meets and exceeds UK, European and US regulations
- Fully recyclable, chemically resistant, UV-stabilised PE
- Platform with hand insert and inspection holes for inspection and pump insertion

**Notes**

- Remove drums before forklifting
- For static spill containment



**Compliance**


Related Regulations	Description
29CFR 1910.22(a)(2)	"The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition."
29CFR 1910.120(j)(1)(vii)	"... suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur."



# 4 Drum Spill Pallet

**SJ-110-006**

Spill Pallet | Four Drum | Secondary Containment


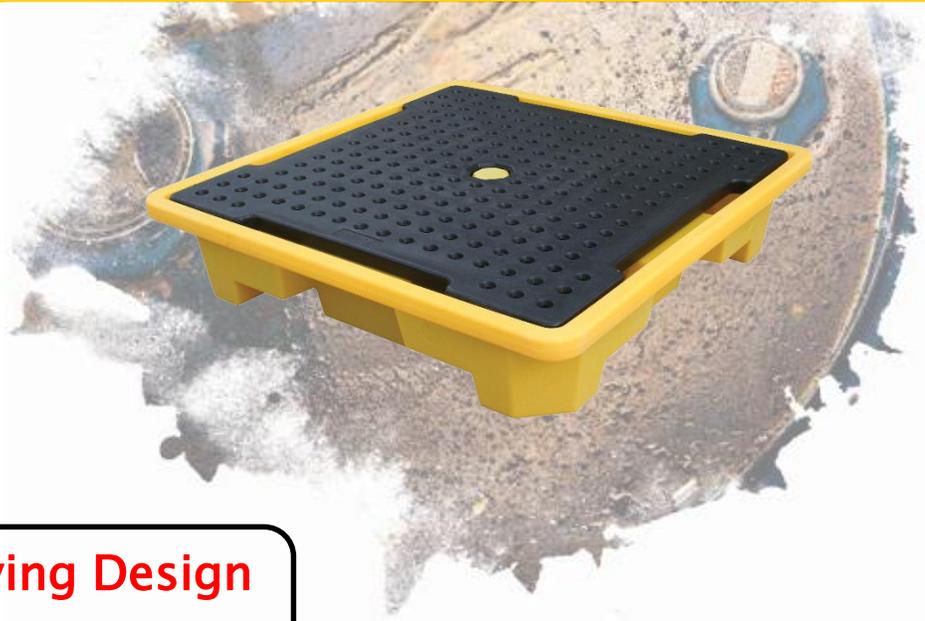


 **Stackable Space-Saving Design**  
Stack up to 20 units per pallet



Unique spill containment sump designed to stack efficiently to minimize transport costs to the distributor and the end user.

Stack up to 20 units per pallet

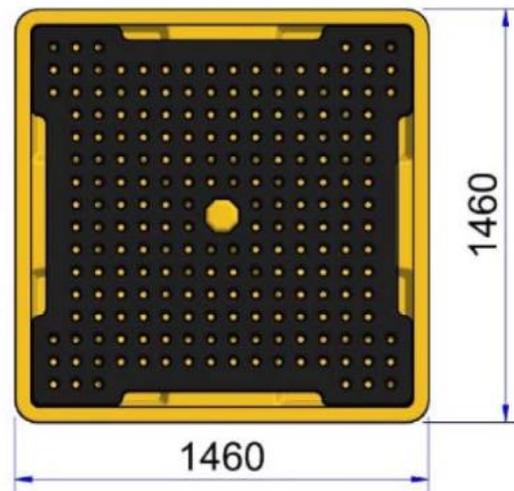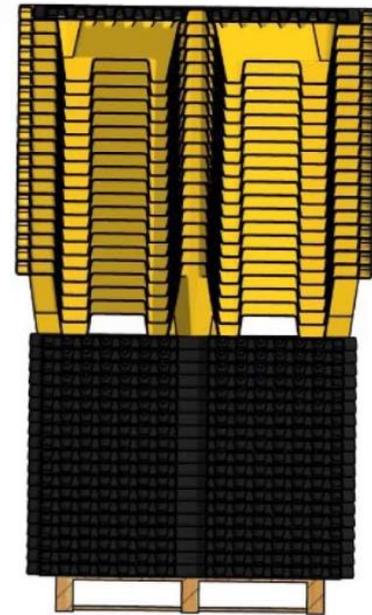

**Compliance**

Related Regulations	Description
29CFR 1910.22(a)(2)	"The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition."
29CFR 1910.120(j)(1)(vii)	"... suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur."