




Plug N Dike with Anti-freeze

PND-AF

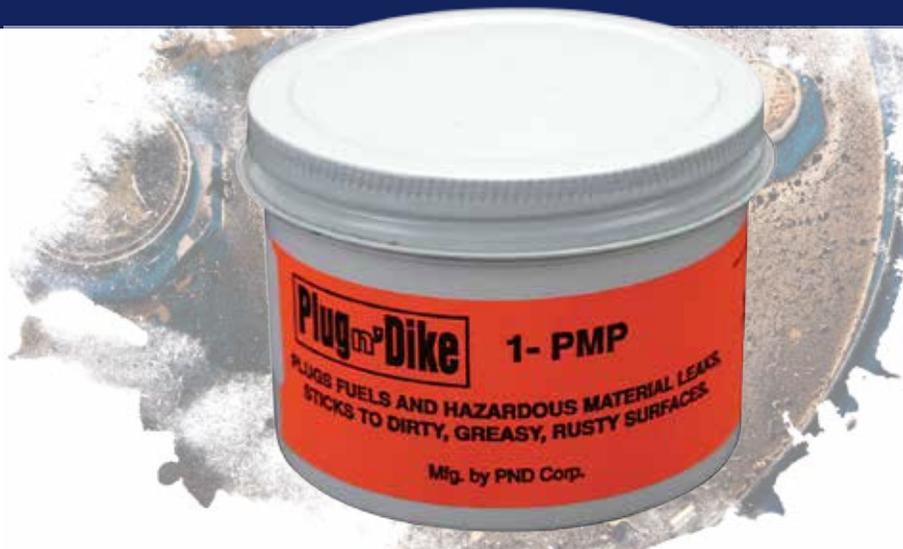

Plug N Dike | Secondary Containment

Product Code	Quantity
PND-AF	1 Jar

Dry, granular Plug N Dike must be mixed with water first to form a heavy paste. The Premixed is ready for immediate use. Plug N Dike Antifreeze is designed to withstand colder climates.

No surface preparation is necessary. Apply the Plug N Dike directly into and around the leak. Press down to get good adhesion. Additional Plug N Dike

can be added over the top. Will hold up to 2-3 feet of head.

Plug N Dike is a temporary plug. For a longer term patch, apply quick-cure epoxy over the top of the Plug N Dike plug. The Plug N Dike seals off the liquid allowing the epoxy to cure.



* Basis weights and recycled content are ± 5%

** Measures a case/bale using ASTM 726 (long test) with medium viscosity oil and tap water. Statistical average derived from real time production QC data.

*** Weight per case ± 0.5 kg/lbs.

Compliance

Related Regulations	Description
29CFR 1910.22(a)(2)	"The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition."
29CFR 1910.120(j)(1)(vii)	"... suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur."